


ESQUEMA ELECTRICO / WIRING DIAGRAM

LED SIGNAL: estados (naranja) / working order (orange)
 LED LE1 (on)= tiempo de arranque / starting time
 LED LE1+LE3 (on)= despegue / harvest (T<Tg)
 LED LE3 (on)= despegue / harvest (T>Tg, t=(d)
 LED LE1+LE2 (on) = fabricación / production (T>Tc)
 LED LE2 (on) = fabricación / production (T<Tc, t=ff)
 LED LE4 (on)= almacén lleno/ full stock

LED SIGNAL: alarmas (naranja intermitente: máquina apagada) /
 warning (flashing orange: machine off)

LED LE1 = Presostato seguridad abierto / High Pressure cut o
 LED LE2 = tiempo fabricación máximo (t>60min para T=Tc) /
 production timeout (t>60min for T=Tc)
 LED LE3 = tiempo despegue máximo (t>5min para T=Tg) /
 harvest timeout (t>5min for T=Tg)
 LED LE4 = error de sonda de ciclo / cycle temp. probe error

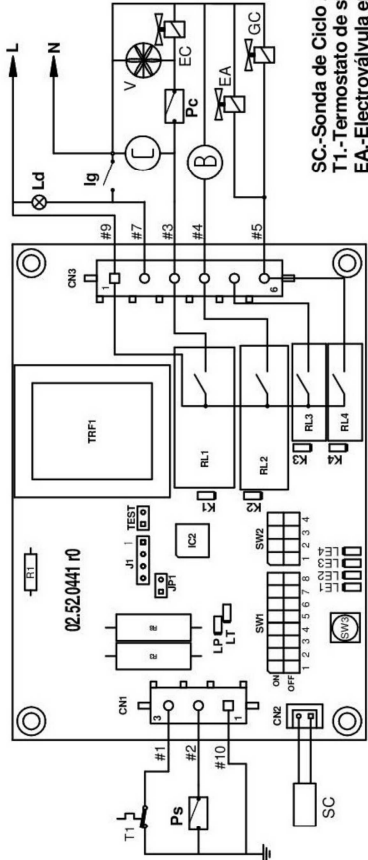

SC.-Sonda de Ciclo / Harvest Assist Probe

T1.-Termostato de stock / Bin Sensor

EA.-Electroválvula entrada agua / Water Inlet electrovalve

GC.-Electroválvula de gas caliente / Hot gas/Harvest electrovalve

C.-Compresor / Compressor

B.-Bomba de agua / Water Pump

Ps.-Presostato Seguridad / High Pressure cut out

V.-Ventilador (solo condensación aire) / Fan (only air condensation)

EC.-Electroválvula de condensación/ Condensation electrovalve

(solo condensación agua) (only water condensation.)

Ig.-Interruptor general / Power Switch

Pc.-Presostato Condensación Ventilador / Fan Control Switch

- #1 black/ negro
- #2 white / blanco
- #3 red / rojo
- #4 orange / naranja
- #5 violet / violeta
- #6 ground / verde-amarillo
- #7 blue/ azul
- #8 grey/ gris
- #9 brown/ marrón
- #10 Yellow / amarillo